


CAT 3 UTP 50 - Port ISDN Termination Panel

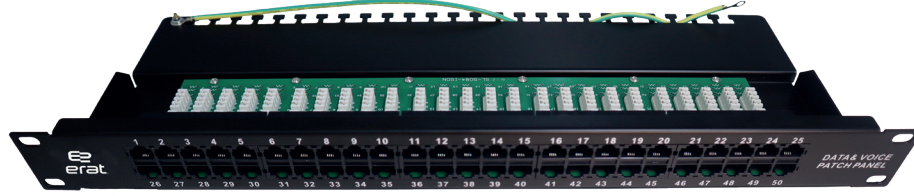

FEATURES

- Supplied with all necessary installation accessories, including labels, color icons, cable management accessories, cable ties, mounting screws, and cage nuts.
- Designed for quick, easy, and organized cable termination and patch panel labeling. Includes clear and detailed installation instructions to help minimize installation errors.
- Backed by a 25-year system performance warranty when installed as part of a complete ERAT structured cabling system.
- Rear cable management bar provides simple cable routing, termination, and organization.
- High-quality metal frame with a robust and easy-to-install design.
- Category 3 ISDN Loaded Patch Panel.
- Suitable for installation in 483 mm (19") standard equipment racks.
- Cable termination via color-coded LSA terminal strips in accordance with EIA/TIA-568A & T568B.
- Cable fixation using cable ties.
- Equipped with a central grounding connection.
- Clamp durability: > 200 insertion cycles in accordance with ISO/IEC 11801 and IEC 60603-7-5.
- IDC termination: Compatible with 22–26 AWG solid and stranded conductors.
- Dielectric Strength: 1000 VDC (Contact-to-Contact), 1500 VDC (Contact-to-Ground).
- Number of Ports: 50.

PHYSICAL CHARACTERISTICS

Supported Conductor Size	22–26 AWG, solid or stranded conductors
Metal Frame	Galvanized steel
Standard Color	Black
Connector Module Holder	Flame-retardant ABS plastic, UL 94 V-0
Plug Retention Force	≥ 140 N
Storage Temperature	–20°C to +80°C
Operating Temperature	–40°C to +60°C
Packaging	1 pc/box