



CAT 7A S-FTP 22 AWG 1000 MHZ OUTDOOR DATA CABLE

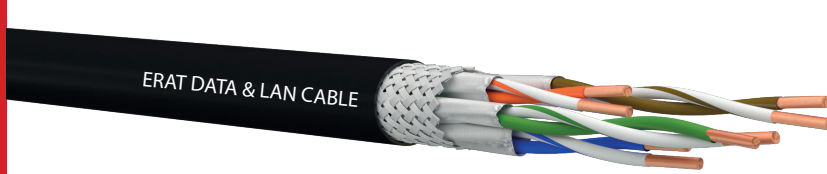

AREAS OF USE / FEATURES		CABLE CONSTRUCTION
ERAT CAT 7A Outdoor cables are designed for outdoor installations and harsh environmental conditions. Featuring a UV-resistant black PE outer jacket, they are suitable for external applications and are used for the transmission of digital and analog voice, data, video, and PoE signals. ERAT CAT 7A S/FTP cables support data transmission rates of up to 10 Gigabit Ethernet (10GBASE-T) with an operating bandwidth of 1000 MHz. Upon customer request, the cables can be manufactured with HFFR or other types of outer jacket materials. • 10000BASE-TX Gigabit Ethernet • 10000BASE-T Gigabit Ethernet • 1000BASE-TX Gigabit Ethernet • 1000BASE-T Gigabit Ethernet • ATM 155 / ATM 25 • 100BASE-T “Fast Ethernet” • 100BASE-T2/ 100BASE-T4 • 100BASE-TX • 10BASE-T Ethernet • ISDN, TPDDI, TP-PMD • Power Over Ethernet (PoE)		1. Copper Conductor 2. PE Isolated 3. Aluminum Foil 4. Tinned Copper Braid 5. Outer Sheath
PHYSICAL PROPERTIES		
Conductor	Pure, annealed copper	
Conductor Diameter	22 AWG	
Isolated	Polyolefin	
Number of Isolates	8, in 4 twisted pairs	
Internal Shielding	Laminated aluminum foil providing 100% opacity (foil side facing outwards)	
External Shielding	Tinned Copper Braid	
Outer Sheath	UV-resistant and weather-resistant PE compound suitable for outdoor installation.	
Jacket Color	Black. (Different colors can be produced upon customer request.)	
Performance Guarantee	A 25-year system performance guarantee is offered when end-to-end ERAT-branded products are used.	
Cable Labeling Information	Brand, Cable type, Relevant standards, Date, Serial number, Meters	
MECHANICAL AND ENVIRONMENTAL PROPERTIES		
Tensile Force	60 N / mm ² max	
Bending Radius (Short-Term)	4 x Cable Diameter	
Bending Radius (Long-Term)	8 x Cable Diameter	
Operating Temperature	-40 to +80 °C	
Installation Temperature	-10 to +60 °C	
Storage Temperature	-40 to +80 °C	

CAT 7A S-FTP 22 AWG 1000 MHZ OUTDOOR DATA CABLE

PACKAGING, DIMENSIONS & WEIGHT

Packaging Type	Outer Diameter (mm)	Approximate Weight (kg)
500 m Plywood Reel	7.9±0.3	28.3
1000 m Plywood Reel	7.9±0.3	56.2

ELECTRICAL PROPERTIES

Impedance Characteristic	100±6 Ohm @ 1-1000 MHz
DC Resistance	70 Ohm/km max.
Resistance Imbalance	2% max.
Effective Capacity	45 pF/m nom. @ 1 KHz
Capacitance Imbalance (to Ground)	1600 pF/km max. @ 1 KHz.
Voltage	72 Vdc max.
Dielectric Strength	1500 Volts / 1 minute min. RMS
Signal Speed (NVP)	Min. %77 - 80
Signal Transmission Time (Propagation Delay)	534 + 36/f ^{1/2} nS/100m max. @ 1-1000 MHz
Inter-lane Signal Skew	25 nS/100m max @ 1-1000 MHz
Insulation Resistance	5000 MegaOhm·km min. @ 500 Vdc
Joint Attenuation	55 dB min @ 30-100 MHz 55-20Log(f/100) @100-1000 MHz
Transfer Impedance	10 mOhm/m max @ 1-30 MHz 30 MOhm/m max @ 30-100 MHz

Frequency (MHz)	Return Loss (dB)	Insertion Loss (dB/100m)	NEXT Loss (dB)	PS NEXT Loss (dB)	PS ELFEXT (dB/100m)
1	20,0	2,1	78,0	75,0	-
4	23,0	3,7	78,0	75,0	75,0
8	24,5	5,2	78,0	75,0	74,2
10	25,0	5,8	78,0	75,0	72,3
16	25,0	7,3	78,0	75,0	68,2
20	25,0	8,2	78,0	75,0	66,3
25	24,3	9,2	78,0	75,0	64,3
31,25	23,6	10,3	78,0	75,0	62,4
62,5	21,5	14,6	78,0	75,0	56,4
100	20,1	18,5	75,4	72,4	52,3
200	18,0	26,5	70,9	67,9	46,3
250	17,3	29,7	69,4	66,4	44,3
300	17,3	32,7	68,2	65,2	42,8
400	17,3	38,0	66,4	63,4	40,3
500	17,3	42,8	64,9	61,9	38,3
600	17,3	47,1	63,7	60,7	36,7
1000	17,3	61,9	60,4	57,4	32,3
800	17,3	58,9	58,9	55,9	32,9
1000	17,3	66,9	57,4	54,4	31,0

ISOLATED COLORS

							
Blue	White	Orange	White	Yellow	White	Brown	White