

19" ERATline 400 Series

Free Standing Cabinets

Width: 600 mm

Depth: 600/800 mm



Production Standards:

- ISO 9001:2015 - Quality Management System
- ISO 14001:2015 - Environmental Management System

Compliance:

- EN 61587-1 Mechanical structures for electronic equipment - Tests for IEC 60917 and IEC 60297 series
- Climatic and Environment: EN 61587-1/4.2, IEC60068-2-1, IEC60068-2-2, IEC60068-2-30
- Static Mechanical Load Lifting: EN 61587-1/5.2.1
- Static Mechanical Load Stiffness: EN 61587-1/5.2.2
- Dynamic Mechanical Load Vibration and Shock, Impact: EN61587-1/5.3.1, EN61587-1/5.3.3, IEC60068-2-6, IEC60068-2-27
- Earth Bond: EN61587-1/6.2
- Flammability: EN 61587-1/6.3
- Degrees of Protection Provided by Enclosures (Ip Code): IP20
- EN 13501-1+ A1- Epoxy Powder coated compliant to Fire classification of construction products and building elements Part 1: Classification using data from reaction to fire tests
- Epoxy Powder coating tested as per EN ISO 9227 and ASTM B 117 Corrosion tests in artificial atmospheres - Salt spray tests; minimum 1000 hours
- EN ISO 2409 Paints and varnishes - Cross-cut test
- EN ISO 2178 Non-magnetic coatings on magnetic substrates
- Measurement of coating thickness - Magnetic method
- RoHS Compliancy according to 2011/65/EU
- CE Compliant to EN 60950-1

Free Standing ERATline 400 Series Cabinets

26U/32U/36U/42U/47U W600xD600 mm / W600xD800 mm

- Multi folded modular design clamped with screws, coated with RAL 9005 epoxy polyester powder.
- The rack has a front glass door, with single point barrel locking and a metal rear door. Also, removable and lockable side panels.
- 1 set of 19" front depth adjustable equipment mounting rails & 1 set of 19" rear fixed equipment mounting rails, U height numbered.
- Removable cable entry panels connected with micro joints are located at the bottom side. PVC and brushed cable entrances are located at the top side. The accessory sliding cable entry can be inserted at the bottom side during the field applications.
- Ventilation slots that can mount single or double fan modules for forced ventilation.
- Front door with 4,0 mm dark coloured and EN 12150-1 compatible tempered secure glass with metal housing.
- Maximum load capacity up to 600kg.
- 4 adjustable feet group included, replaceable by a castor set (optional).

Maximum load capacity up to 600 kg.



Standard



Optional




19" ERATline 400 Series

Free Standing Cabinets

Width: 600 mm

Depth: 600/800 mm

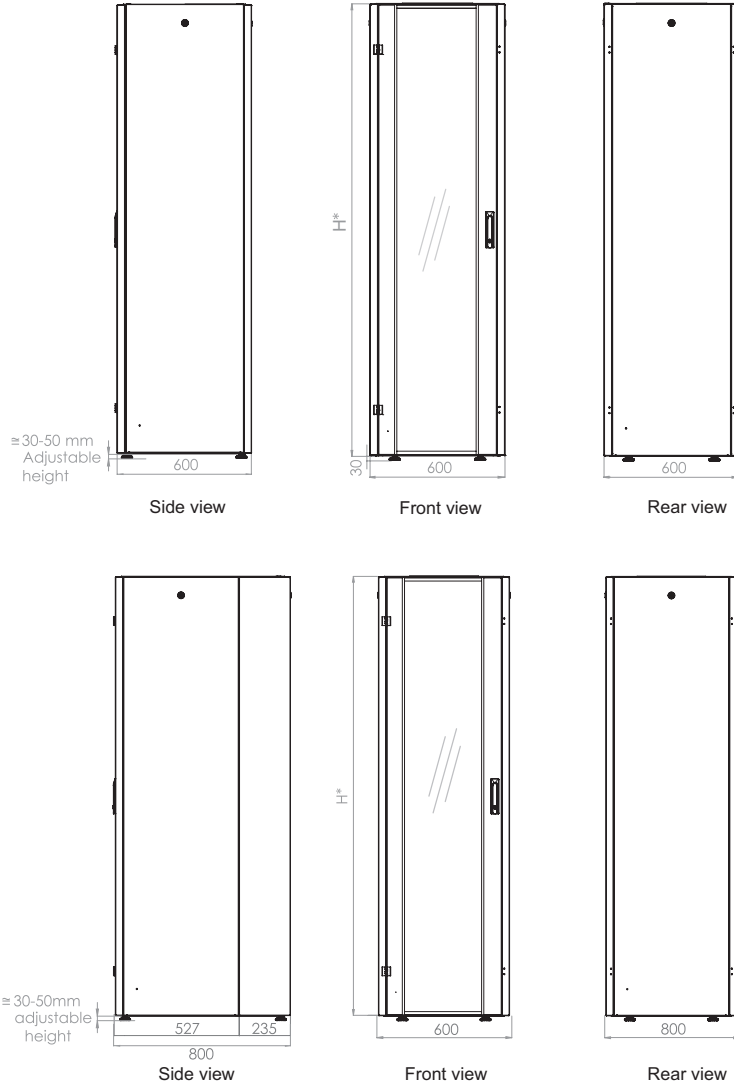

19" ERATline 400 Series Free Standing Cabinets W600 x D600 mm		
Dimensions WxDxH mm	Package Size WxDxH mm	Product Description
600x600x1299	650x650x1309	26U W600 x D600 mm Free Standing Cabinet
600x600x1566	650x650x1576	32U W600 x D600 mm Free Standing Cabinet
600x600x1744	650x650x1754	36U W600 x D600 mm Free Standing Cabinet
600x600x2010	650x650x2020	42U W600 x D600 mm Free Standing Cabinet
600x600x2232	650x650x2242	47U W600 x D600 mm Free Standing Cabinet

19" ERATline 400 Series Free Standing Cabinets W600 x D800 mm		
Dimensions WxDxH mm	Package Size WxDxH mm	Product Description
600x800x1299	650x850x1309	26U W600 x D800 mm Free Standing Cabinet
600x800x1566	650x850x1576	32U W600 x D800 mm Free Standing Cabinet
600x800x1744	650x850x1754	36U W600 x D800 mm Free Standing Cabinet
600x800x2010	650x850x2020	42U W600 x D800 mm Free Standing Cabinet
600x800x2232	650x850x2242	47U W600 x D800 mm Free Standing Cabinet

* H length can be checked from the product dimensions.

